PRODUCT: PR - XX (TD) - XX (A) - AX8 (M) (LG) ORDER DESC.: OBXX - OAXX - AX8XXXX

PR1600 SERIES - MILD STEEL ROLLER WITH FEMALE THREADED AXLE - GREASED BEARINGS

DIMENSION	MEASUREMENT
TD	
A	
OB	
OA	
EXTN	
M	
LG	

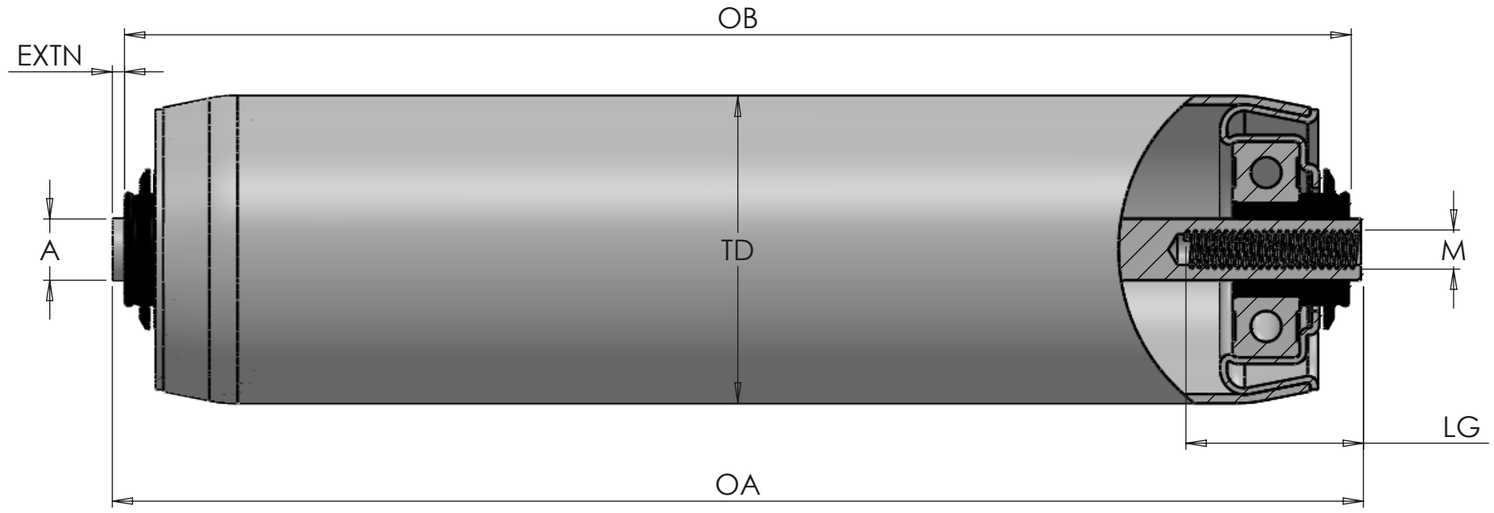

BELOW ARE TUBE DIAMETER OPTIONS, PLEASE SELECT AXLE FROM THE SAME ROW

TD	TUBE DIAMETER & THICKNESS	ROUND AXLE (A)					HEX AXLE (A)	
		Ø	Ø	Ø	Ø	Ø	HEX	HEX
50	50 x 1.5	10	11	12	15	17	8H	11H
50MD	51 x 2.0	10	11	12	15	17	8H	11H
50HD	51 x 3.0	10	11	12	15	17	8H	11H
60	60 x 2.0	10	11	12	15		11H	
60HD	60 x 3.0	17						
63	63.5 x 3.0	16	20				14H	
70MD	70 X 2.0	15	17					
703	70 x 3.0	17						
803	80 x 3.0	20						

PART CODE BREAKDOWN

TD = TUBE DIAMETER
A = AXLE DIA
OB = OVER BEARING
OA = OVER AXLE

AX8 = FEMALE THREADED AXLE
M = THREAD SIZE
LG = THREAD LENGTH

GENERATE ORDER CODE BELOW QTY:

TD	A		M	LG
PR- ___	- ____	- AX8	OB_____OA_____AX8_____	

COPYRIGHT RESERVED

REVISION: 1

UNIT 3, ALBION WORKS
MOOR STREET,
BRIERLEY HILL,
WEST MIDS,
ENGLAND,
DY5 3SZ

AED Rollers
Best rollers Best service

TITLE: PR1600 SERIES

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	DWG NO. PR-ORDER-AX8	A3
	NAME	REVISION	DATE	FINISH: BZP		
DRAWN	K JEAVONS	1	12/01/2024	MATERIAL: MILD STEEL	SCALE:1:2	SHEET 1 OF 1
				WEIGHT:		