


TD A M LG OB OA

ORDER CODE: PR - XX - XX - AX8XXXX - XXX - XXX

PR1600 SERIES - MILD STEEL FEMALE THREADED AXLE GRAVITY ROLLER - GREASED BEARINGS

DIMENSION	MEASUREMENT
TD	
A	
OB	
OA	
EXTN	
M	
LG	

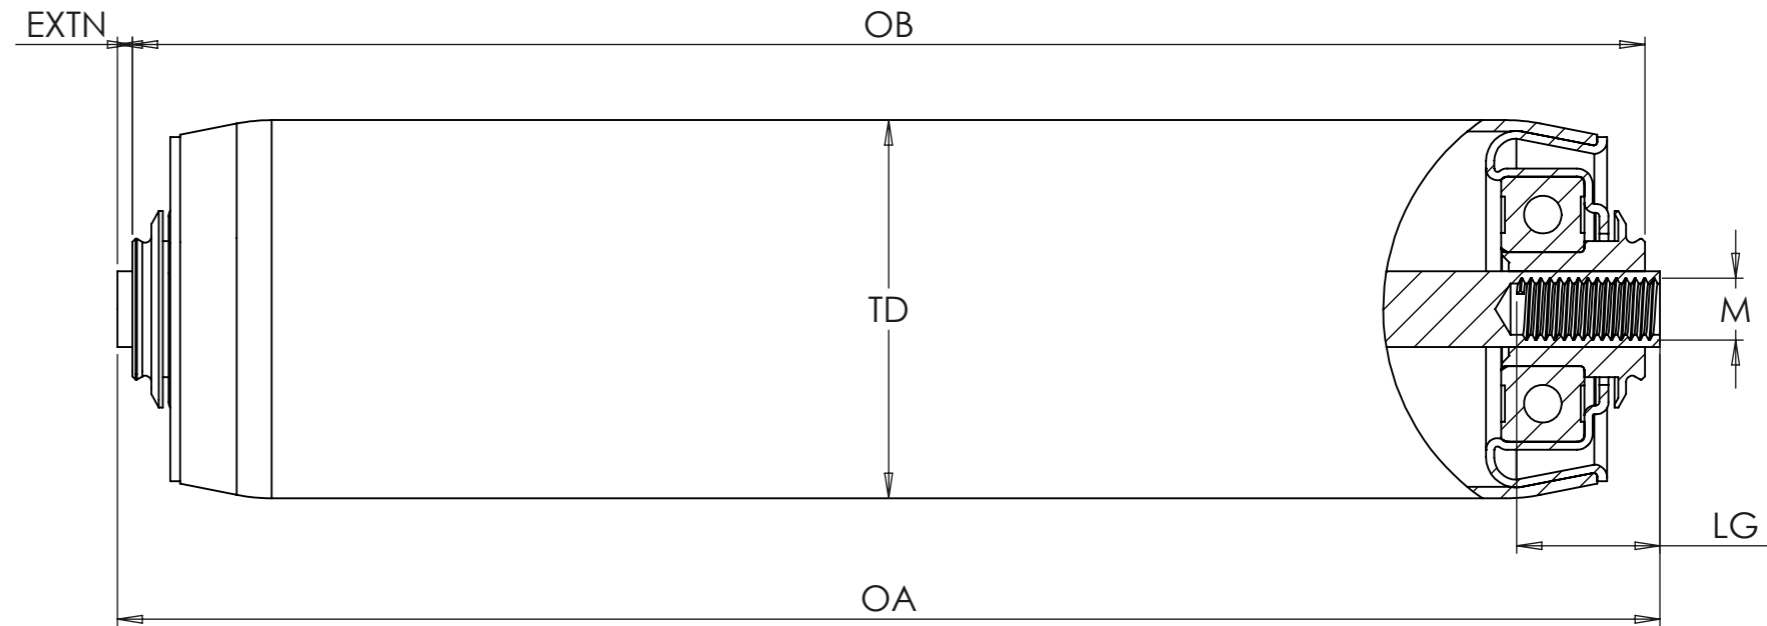

BELOW ARE TUBE DIAMETER OPTIONS, PLEASE SELECT AXLE FROM THE SAME ROW

TUBE DIAMETER & THICKNESS	AXLE DIAMETER OPTIONS (mm)							
	Ø	Ø	Ø	Ø	Ø	Ø	Ø	Ø
50 x 1.5	10	11	12		15		17	
51 x 2.0	10	11	12		15		17	
51 x 3.0	10	11	12		15		17	
60 x 2.0	10	11	12		15			
60 x 3.0							17	
63.5 x 3.0				14		16		20
70 x 3.0							17	
80 x 3.0								20

PART CODE BREAKDOWN

PR = GREASED BEARINGS
 TD = TUBE DIA (E.G. 50)
 A = AXLE DIA (E.G. 10)
 AX8 = FEMALE THREADED AXLE
 M = THREAD SIZE (E.G. 8MM)
 LG = LENGTH OF THREAD (E.G 16MM)
 OB = OVER BEARING (E.G 400MM)
 OA = OVER AXLE (E.G 404MM)

EXAMPLE: PR-50-10-AX8816-400-404
 FOR A Ø50 ROLLER WITH 10MM AXLE
 WITH A FEMALE THREAD M8 BY 16MM LONG.
 LOCATED 10MM FROM THE END OF AXLE.
 WITH AN OVERBEARING LENGTH OF
 400MM AND AN AXLE LENGTH OF 404MM

UNIT 3, ALBION WORKS
MOOR STREET,
BRIERLEY HILL,
WEST MIDS,
ENGLAND,
DY5 3SZ



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	DWG NO.	
NAME	REVISION	DATE	FINISH: BZP	PR-ORDER-AX8	A3
DRAWN	K JEAVONS	1	MATERIAL: MILD STEEL		
			WEIGHT:	SCALE: 1:2	SHEET 1 OF 1

COPYRIGHT RESERVED REVISION: 1

TITLE: