


ORDER CODE: PR - XX - XX - AX1 - XXX - XXX

PR1600 SERIES - MILD STEEL SPRING LOADED GRAVITY ROLLER - GREASED BEARINGS

DIMENSION	MEASUREMENT
TD	
A	
OB	
OA	
EXTN	

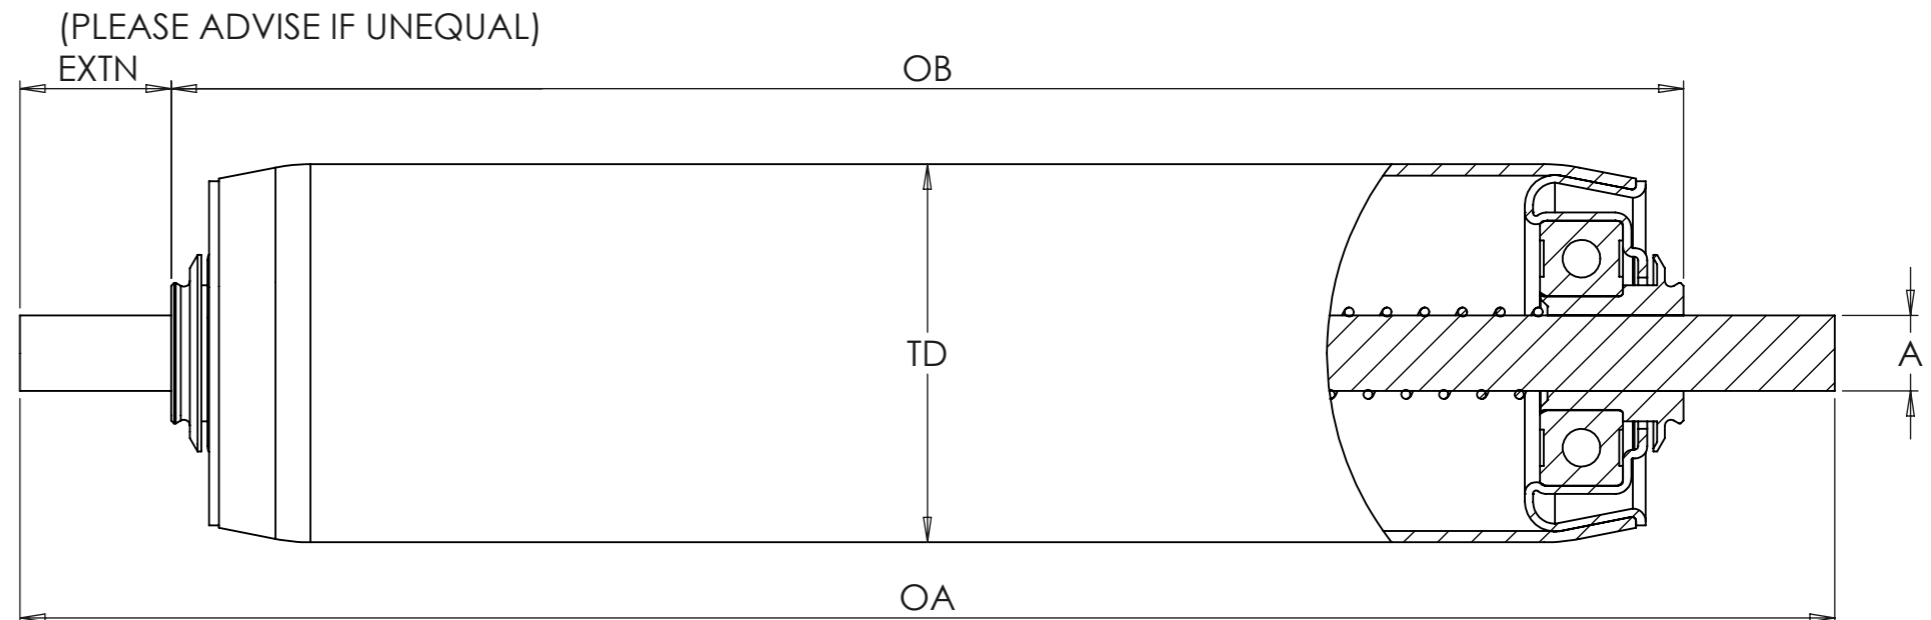

BELOW ARE TUBE DIAMETER OPTIONS, PLEASE SELECT AXLE FROM THE SAME ROW

TUBE DIAMETER & THICKNESS	AXLE DIAMETER								
	HEX	∅	∅	HEX	∅	∅	∅	∅	∅
50 x 1.5	8 HEX	10	11	11 HEX	12		15		17
51 x 2.0	8 HEX	10	11	11 HEX	12		15		17
51 x 3.0	8 HEX	10	11	11 HEX	12		15		17
60 x 2.0		10	11	11 HEX			15		
63.5 x 3.0						14		16	

PART CODE BREAKDOWN

PR = GREASED BEARINGS
 TD = TUBE DIA (E.G. 50)
 A = AXLE DIA (E.G. 10)
 AX1 = SPRING LOADED
 OB = OVER BEARING (E.G 400MM)
 OA = OVER AXLE (E.G 440MM)

EXAMPLE: PR-50-10-AX1-400-440 FOR A ∅50 ROLLER WITH 10MM SPRING LOADED WITH A OVER BEARING OF 400MM AND AND AXLE LENGTH OF 440MM

UNIT 3, ALBION WORKS MOOR STREET, BRIERLEY HILL, WEST MIDS, ENGLAND, DY5 3SZ		AED Rollers Best rollers Best service		COPYRIGHT RESERVED		REVISION: 1	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS				DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	
DRAWN: K JEAVONS		REVISION: 1		DATE: 12/01/2024		WEIGHT:	
MATERIAL: MILD STEEL				FINISH: BZP		DWG NO. PR-ORDER-AX1	
SCALE: 1:2				SHEET 1 OF 1		A3	